



www.xlam.biz



# XL350 Easy



Lamination width

350 mm

max. temperature

180 °C

maximum speed


1,5 m/min

IDEAL FOR  
UV-DTF

High quality UV printing



Laminated with a special PET film

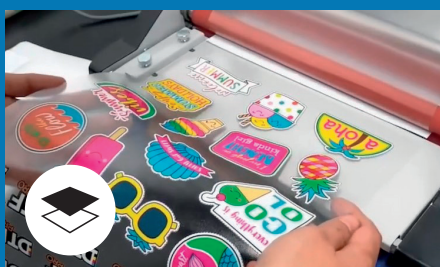

Easily apply to any material!



# XL350 Easy

## DESKTOP HOT LAMINATOR



[www.xlam.biz](http://www.xlam.biz) / [info@xlam.biz](mailto:info@xlam.biz)

### Unique features!

Hot roll-to-roll pneumatic laminator 350 mm. Complete with rewinder. **Silicone roller (heated) maximum temperature 180°C**. Material thickness up to 1,2mm.

Quick and easy to use, it allows you to save labor and improve productivity by increasing the quality of your work. You can also laminate from both the sides (**encapsulation**).

### High efficiency

No creases or bubbles, it guarantees excellent results even at temperatures below 180°C. Ideal for laminating single sheets, **particularly useful in the UV-DTF process** where it is necessary to couple the film to be transferred.

### Guaranteed safety

The emergency stop button is clearly visible on the top side. Thanks to the safety blocks placed on all the poles there is no risk of involuntary movements of the supports.

#### Product code

XL350E

#### Main roller diameter

30 mm

#### Packaging

anti-shock in rigid cardboard

#### Maximum lamination film width

350 mm

#### Roller handling

electrical

#### Machine size (l x h x p)

620 X 280 x 300 mm

#### Maximum material thickness

1,2 mm

#### Feeding

manual

#### Packaging size (l x h x p)

640 X 340 x 370 mm

#### Maximum temperature

180 °C

#### Take up system

included

#### Machine weight / Packaging weight

13,5 kg / 15 kg

#### Minimum - maximum speed

0,1 - 1,5 lmt/min

#### Heating method

internal with resistance

#### Safety

CE certification

#### Temperature / speed control

Micro Control

#### Maximum power / voltage

640 W / 220-230 v - 50-60 hz

#### Warranty

12 months

Simple and compact ✓



Swinging work surface ↑



Safety locks on the poles 👍



\* Note: Draft Version (B), the data reported in the Draft version are to be confirmed.

This brochure may be subject to changes as it is being revised for which it is intended as SE&O.

Authorized Reseller